



# ASPHALT WALK

THE SOLUTION FOR OUTDOOR COMMUNICATION

AsphaltWalk is designed to be used for short to midterm applications dependent on where the product is applied. The product can be used on asphalt, cement and untreated stone, pavement and many more surfaces.

The material can easily be removed from such surfaces. AsphaltWalk is designed to be very robust against abrasion and other influences caused by normal use of the product. The special adhesive is designed to work outdoor on rough surfaces.

## Uses

- Shop entries & stairways
- Bus, tramway or metro stations, airports
- Sport events: Motor sport events, marathons etc.
- Car, motorbike & general vehicle resellers
- Museums, meetings and other cultural events
- Petrol stations
- Car parks - indoor and outdoor including driveways
- Fast food drive through
- Sports stadiums
- Pedestrian areas

## Features & Benefits

- High visual impact
- Easy to apply and remove
- Suitable for rough surfaces
- Slip resistant
- PVC free







# ASPHALT WALK

THE SOLUTION FOR OUTDOOR COMMUNICATION

## Durability

The durability of AsphaltWalk is dependent on the way the product has been applied – especially also on how it has been adjusted to uneven surfaces as well as on the surface in general on where it has been applied. We recommend a maximum use of 1–6 months. Furthermore, it also depends on the mechanical use of the surface where it is applied.

## Storage

Shelf life is 12 months from the date of delivery. Storage conditions +15°C to +24°C and relative humidity between 40% and 65%.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

UV curable inks and latex

## Waste handling

AsphaltWalk is designed to be fully recyclable. Used material and production waste can be handled as "aluminum waste".

## Technical information

Size	Width: 1.22 m Length: 10.16 m, 15.24 m, 30.48 m	
Material	Coated soft aluminum (polyurethane)	220μ +/- 10μ
Adhesive	Permanent acrylic solvent	80μ +/- 5μ
	Total weight	428 g/m <sup>2</sup>
Certificates	Surfaces roughness (SRT)	55
	Slip-resistance	R12 / BS7976
	Flame resistance	M1 / F2
Application	minimum application temperature	+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	80oz/in (88N/100 mm)	50oz/in (55N/100mm)	70oz/in (77N/100mm)
24 hours dwell	100oz/in (110N/100 mm)	60oz/in (66N/100 mm)	80oz/in (88N/100 mm)

## Chemical resistance

Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	I	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion  
 I = recommended for intermittent exposure only  
 NR = not recommended

- Liquid varnish may extend life cycle





# TEX WALK

THE SOLUTION FOR INDOOR & OUTDOOR COMMUNICATION

TexWalk is a fabric with a textured matte vinyl coating. It is designed to be used for short to midterm applications, dependent on where the product is applied. TexWalk works great on carpet, tile, concrete, wooden and PVC floors, untreated stone and almost every surface indoor and outdoor.

## Uses

- Applied on top of carpeting, tiles, wooden and PVC floors and untreated stone
- Wall graphics
- Door coverage
- Tradeshows (exhibition walls and floors)
- POP / POS

## Features & Benefits

- Structured matte finish
- No or almost no adhesive residue
- Sticks on almost any surface
- Easy to apply and remove
- Print and go - no laminate solution
- Digital cutting into any shape







# TEX WALK

## THE SOLUTION FOR INDOOR COMMUNICATION

### Durability

The durability of TexWalk is dependent on the way the product has been applied and it also depends on the mechanical use of the surface where it is applied. Our experiences suggest the following:

- indoor floor up to 3 months (depending on traffic)
- outdoor sidewalk up to 3 months (depending on traffic)
- indoor wall up to 36 months
- outdoor wall up to 12 months

### Storage

Shelf life is 12 months from the date of delivery. Storage conditions +15°C to +24°C and relative humidity between 40% and 65%.

### Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

### Printing method

UV curable inks, solvent, eco-solvent and latex

### Waste handling

We recommend to handle the production waste and the used material as industrial waste.

### Technical information

Size	Width: 1.22 m	Length: 25.00 m	
Material	Fabric with a textured matte vinyl coating (white)		0.10 - 0.25 mm
Adhesive	permanent acrylic solvent		80μ +/- 5μ
Certificates	Slip-resistance		R12 / BS7976
	Flame resistance		M1 / F3
Application	Minimum application temperature		+10°C / +50°F



- Liquid varnish may extend life cycle





# SPORT WALK

COMMUNICATION IS NOW POSSIBLE ON ANY SPORTIVE EVENT

SportWalk can be used for short to midterm applications. The material is applicable on various outdoor surfaces. The foil consists of a dimension stable film with a textured resilient surface. The reverse side is coated with a pressure sensitive adhesive covered by a removable liner. The product provides a resilient, durable, slip resistant surface for a large variety of applications.

The foil is characterized by an extremely secure and slip resistant surface, a chemical resistance and longevity. Moreover, the quick and easy portable product is extremely foot friendly. The waterproof adhesive and the therewith associated durability of the foil guarantee a versatile usability.

## Uses

- Sports events
- Road shows

## Features & Benefits

- Extremely secure with its slip-resistant surface
- Can be cut to shape
- Robust against abrasion
- Good chemical resistance
  - laboratory report from Quality Labs
- No lamination required







# SPORT WALK

COMMUNICATION IS NOW POSSIBLE ON ANY SPORTIVE EVENT

## Durability

The durability depends on the way the product has been applied as well as on the condition of the surface and the amount and type of traffic on the area. SportWalk may be used for short outdoor applications (1 - 2 weeks).

If you are using SportWalk indoor you may see (dependent on the surface) adhesive residues. In such cases we recommend citrus cleaner to remove such residues.

## Storage

It is recommended to store the product in a closed packaging at a temperature of +15°C to +30°C and relative humidity between 45% and 60%. The product has a shelf life of 24 months after purchasing the material.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

UV curable inks, solvent, eco-solvent and latex

## Waste handling

It is recommended to handle the used material as industrial waste.

- Liquid varnish may extend life cycle

info@continentalgrafix.com  
www.asphaltart.com

## Technical information

Size	Width: 1.30 m	Length: 30.48 m	
Material	vinyl foam		450μ +/- 5μ
Adhesive	clear acrylic adhesive		50μ +/- 5μ
Certificate	Slip-resistance		R10
Application	minimum application temperature		+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	55oz/in (66N/100 mm)	20oz/in (22N/100 mm)	40oz/in (44N/100 mm)
24 hours dwell	75oz/in (82N/100 mm)	25oz/in (27N/100 mm)	55oz/in (60N/100 mm)

## Further data

Coefficient of Friction (Kinetic) Dry / Wet	Rubber: 0,9 / 1,0 Leather: 0,3 / 1,0
Minimum application temperature	+10°C / +50°F**
Service temperature minimum and maximum	-28°C/-20°F / +104°C/+220°F
Flammability	to be tested

## Chemical resistance

Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	R	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion  
I = recommended for intermittent exposure only  
NR = not recommended

\* Colour and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.

\*\*At temperatures below +10 °C the surface has to be pre-treated with a gas burner.





# CAT / CLEAR WALK

MAKE INDOOR FLOOR AND WET AREA LOOK LIKE A CATWALK

CatWalk can be used for short to midterm applications. The material is applicable on various indoor surfaces. The foil consists of a dimension stable film with a textured resilient surface. The reverse side is coated with a pressure sensitive adhesive covered by a removable liner.

The product is provided with a resilient, durable and chemical resistance as well as a slip resistant surface for a large variety of applications. Moreover, the quick and easy portable product is extremely foot friendly. The waterproof adhesive and the therewith associated durability of the foil guarantee a versatile usability.

## Features & Benefits

- Extremely secure with its slip-resistant surface
- Can be cut to shape
- Robust against abrasion
- Good chemical resistance
- Antibacterial surface - laboratory report from Quality Labs
- No lamination required

## Uses

- Exhibitions
- Retail
- Leisure centres
- Swimming pools
- Saunas
- Point of purchase
- Supermarkets, shopping malls
- Pharmacies
- Bathrooms







# CAT / CLEAR WALK

MAKE INDOOR FLOOR AND WET AREA LOOK LIKE A CATWALK

## Durability

The durability depends on the way the product has been applied as well as on the condition of the surface and the amount and type of traffic on the area. We recommend a max 3 months use for indoor or wet area applications. Extended durability is possible when using a liquid laminate onto the printed area.

## Storage

It is recommended to store the product in a closed packaging at a temperature of +15°C to +30°C and relative humidity between 45% and 60%. The product has a shelf life of 24 months after purchasing the material.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

UV curable inks, solvent, eco-solvent and latex

## Waste handling

CatWalk can be burned after use and it is recommended to handle the production waste and the used material as industrial waste.

- Liquid varnish may extend life cycle

- Same product also available in clear as "ClearWalk" with higher tack

info@continentalgrafix.com  
www.asphaltart.com

## Technical information

Size	Width: 1.30 m	Length: 30.48 m
Material	vinyl foam	450μ +/- 5μ
Adhesive	clear acrylic adhesive	50μ +/- 5μ
Certificate	Slip-resistance	R10
Application	minimum application temperature	+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	55oz/in (66N/100 mm)	20oz/in (22N/100 mm)	40oz/in (44N/100 mm)
24 hours dwell	75oz/in (82N/100 mm)	25oz/in (27N/100 mm)	55oz/in (60N/100 mm)

## Chemical resistance

Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	R	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion

I = recommended for intermittent exposure only

NR = not recommended

## Further data

Coefficient of Friction (Kinetic) Dry / Wet	Rubber: 0,9 / 1,0 Leather: 0,3 / 1,0
Minimum application temperature	+10°C / +50°F**
Flammability	not tested

\* Colour and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.

\*\*At temperatures below +10 °C the surface has to be pre-treated with a gas burner.





# STAR WALK

## THE SOLUTION FOR MARBLE

StarWalk is a laminated PET vinyl film with a silver metallized back that is designed for an easy application, repositionable and removable without any residues. The film is especially designed for marble, polished and smooth stone. The especially for this kind of application designed adhesive has a felt low tack that is developing its full adhesive strength after 24 to 48 hours.

Due to the good repositioning ability and the low tack feeling at the beginning the application is even for inexperienced users very easy.

### Applications

- Marble
- Polished stone
- Smooth stone

### Advantages

- Easy application and removal
- Removal without adhesive residue
- Excellent durability
- Great heat resistance and dimensional stability
- Cleanable back

### Advice

- The adhesive back needs to be applied on the origin liner or on another siliconized liner if you would like to reuse it with temporary storage.
- The silver back can be cleaned with cold water if it's polluted.
- Not recommended or only after previous testing for applications on the following surfaces: vinyl, aluminum, copper.
- It is recommended to round the corners.







# STAR WALK

THE SOLUTION FOR MARBLE

## Durability

Up to 1 year for indoor applications.

## Shelf life

1 year from date of delivery, stored at +15°C to +24°C and relative humidity between 40% and 65%.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

UV curable inks, solvent, eco-solvent and latex

## Waste handling

It is recommended to handle the used material and production waste as industrial waste.

### Technical Information StarWalk

Size	Width: 1.37 m	Length: 30.48 m	
Material	Vinyl film - Self-adhesive - Printable white front - Silver back - Siliconized paper liner		170μ +/- 5μ    63g/m2
Adhesive	Repositionable special adhesive		30g/m2

### Technical Information StarWalk laminate

Size	Width: 1.37 m	Length: 30.48 m	
Material	self-adhesive structured laminate		170μ +/- 5μ
Adhesive	permanent, clear adhesive		30g/m2
Certificate	Slip resistance		R11







# ATHLETIC WALK

## THE SOLUTION FOR SPORTS HALL FLOORS

AthleticWalk is a laminated PET vinyl film with a silver metallized back that is designed for an easy application, repositionable and removable without any residues. The film is especially designed for indoor sports hall floors with a very smooth surface. The especially for this kind of application designed adhesive has a felt low tack that is developing its full adhesive strength after 24 to 48 hours.

Due to the good repositioning ability and the low tack feeling at the beginning the application is even for inexperienced users very easy.

### Applications

- Indoor sports floors
- Sports hall floors

### Advantages

- Easy application and removal
- Removal without adhesive residue
- Excellent durability
- Great heat resistance and dimensional stability
- Cleanable back

### Advice

- The adhesive back needs to be applied on the origin liner or on another siliconized liner if you would like to reuse it with temporary storage.
- The silver back can be cleaned with cold water if it's polluted.
- It is recommended to round the corners.







# ATHLETIC WALK

## THE SOLUTION FOR SPORTS HALL FLOORS

### Durability

Up to 1 year for indoor applications.

### Shelf life

1 year from date of delivery, stored at +15°C to +24°C and relative humidity between 40% and 65%.

### Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

### Printing method

UV curable inks, solvent, eco-solvent and latex

### Waste handling

It is recommended to handle the used material and production waste as industrial waste.

### Technical Information AthleticWalk

Size	Width: 1.37 m	Length: 30.48 m	
Material	Vinyl film - Self-adhesive - Printable white front - Silver back - Siliconized paper liner		100μ +/- 5μ  63g/m2
Adhesive	Repositionable special adhesive		30g/m2

### Technical Information AthleticWalk laminate

Size	Width: 1.37 m	Length: 30.48 m	
Material	Self-adhesive structured laminate		100μ +/- 5μ
Adhesive	Permanent, clear adhesive		30g/m2
Certificate	Slip resistance		R10







# LUMI WALK

COMMUNICATE NIGHT AND DAY WITH A PHOTO LUMINESCENT EFFECT


LumiWalk can be used for short to long-term bonding. It is designed to be very robust against abrasion and other damages caused by normal use of the product. LumiWalk is made of a vinyl film with a rough photo luminescent non-skid special surface coating. The luminescent pigments charge the light and generate the glow of the foil in the dark. The film adheres with a special acrylic adhesive. LumiWalk is adapted for safety applications. The extremely high slip resistance allows you to apply the product at many places with high frequency and middle to high mechanical abrasion. The specially aligned multilayered structure allows the application of the foil on rough and/or textured surfaces as well as on stairs.

## Uses

- Individualised / customised safety applications
- Directional signage
- Low light corporate branding
- Eye-catching floor advertising especially in the wintertime
- Safety markings
- Stairs
- Boats

## Features & Benefits

- Photo luminescent material
- Can be used for short to long-term bonding
- High slip-resistant surface
- Good chemical resistance
- Robust against abrasion
- Apply on rough and/or textured surfaces
- Usable on stairs

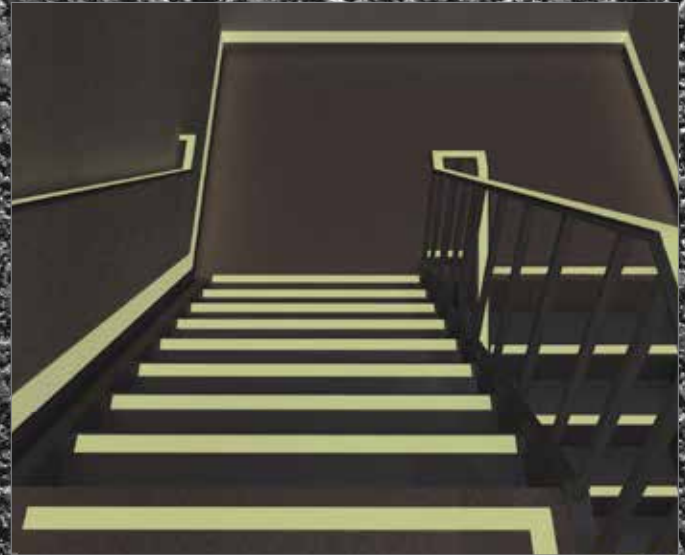





# LUMI WALK

COMMUNICATE NIGHT AND DAY WITH A PHOTO LUMINESCENT EFFECT

## Durability

The durability of LumiWalk depends on the way the product has been applied – especially also on how it has been adjusted to uneven surfaces as well as on the surface in general on where it has been applied. Furthermore it also depends on the mechanical use of the surface where it is applied (high frequented area or not). We recommend a 12 months use for indoor applications.

## Storage

The product also needs to be stored packed with a light absorbing packaging covered. It is recommended to store the product in the original packaging. Temperature +15°C to +30°C and relative humidity between 45% and 60%. The product has a shelf life of 24 months after purchasing the material.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

UV curable inks. Due to the rough surface we recommend special attention to avoid head crashes.

## Waste handling

LumiWalk can be burned after use and it is recommended to handle the production waste and the used material as industrial waste.

## Technical information

Size	Width: 0.686 m	Length: 30.48 m	
Material	luminescent coating		480μ +/- 5μ
Adhesive	clear acrylic adhesive		50μ +/- 5μ
Release liner	paper liner		180μ +/- 5μ

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	90oz/in (99N/100 mm)	55oz/in (60N/100mm)	80oz/in (88N/100mm)
24 hours dwell	110oz/ in(120N/100 mm)	65oz/in (71N/100 mm)	85oz/in (93N/100 mm)

## Chemical resistance

Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	I	99% IPA	R
Gasoline unleaded	I		

R = recommended for non continuous immersion  
I = recommended for intermittent exposure only  
NR = not recommended

## Luminous Values DIN 67510, ASTM 2072, ISO 15370, MEA# 235-05-M

Xe lamp 1000Lx/5mm) 10 min: 146 mcd/m <sup>2</sup>	Xe lamp 1000Lx/5mm) 60 min: 23 mcd/m <sup>2</sup>
Application temperature (Min. / Max.)**	+10°C/+50°F / +30°C/+86°F
Service temperature (Min. / Max.)	-28°C/-20°F / +104°C/+220°F
Flammability	not tested

\* Colour and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.

\*\*At temperatures below +10 °C the surface has to be pre-treated with a gas burner.





# SOFT WALK

COMMUNICATE ON INDOOR AND OUTDOOR FLOORS IN A BLINK

SoftWalk can be applied as a carpet and is reusable. It can be used indoors as well as outdoors. The material is made of a vinyl soft foam. Antibacterial coating prevents the growth of unwanted bacteria and ensures hygiene for applications on humid floor. Thanks to the special profile the material can be cleaned easily and the free water drain on the reverse side is given. The SoftWalk adapts simply to many surfaces and can be installed smoothly. SoftWalk is suitable as a reusable advertising product for fairs or events and can be used for daily changing applications.

It attracts attention, gives you a "Soft Walk" feeling, ensures greater safety and simply looks good. When you apply it outdoor you may use double sided tapes when windy conditions to keep it on the ground. The product is able to float on water. The lifetime can be extended by covering the surface with liquid varnish. The product can be printed on both sides.

## Uses

- Sports stadiums
- Road shows
- Museums and public galleries
- POS advertising carpet
- Exhibitions
- Shop entrances
- Retail environments
- Swimming pools

## Features & Benefits

- Easy to apply, rolls out like a carpet
- Easy to remove
- Reusable
- Antibacterial coating
- Liquid varnish may extend life cycle







# SOFT WALK

COMMUNICATE ON INDOOR AND OUTDOOR FLOORS IN A BLINK

## Durability

The short term life depends on the proper use as well as on the mechanical influences.

## Storage

The product has a shelf life of 12 months after purchasing the material. It is recommended to store the product at a temperature of +15°C to +24°C and relative humidity between 45% and 60%.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

The material can be printed coloured with UV curable inks. The material comes with liner.

## Waste handling

Used material and production waste can be handled as "plastic" waste.

## Technical information

Size	Width: 1.524 m	Length: 5 m / 25 m	
Material	vinyl soft foam (polyethylene)		480µ +/- 5µ
Total weight	950 g/m <sup>2</sup> ± 5%		
	very good slip-resistance		



- Liquid varnish may extend life cycle





# CARPET WALK

PRINTABLE CARPET FOR TRADE SHOWS AND MORE

CarpetWalk is a printable needle felt carpet that is perfect for trade shows and events. CarpetWalk can be rolled out and reused like other carpets. It can be used both indoors and outdoors. With CarpetTape you can apply and remove CarpetWalk very easy and without residue.

## Uses

- Trade shows
- Museum
- Road shows
- POS
- Events
- Exhibitions
- Stages

## Features & Benefits

- Easy to apply, rolls out like a carpet
- Reusable
- Waterproof
- Slip-resistance







# CARPET WALK

## PRINTABLE CARPET FOR TRADE SHOWS AND MORE

### Durability

The durability for up to 1 year depends on the proper use as well as on the mechanical influences.

### Storage

The product has a shelf life of 12 months after purchasing the material. It is recommended to store the product at a temperature of +15°C to +24°C and relative humidity between 45% and 60%.

### Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

### Printing method

UV curable inks, latex (higher abrasion) and sublimation

### Waste handling

Used material and production waste can be handled as "plastic" waste.

### Advice

CarpetWalk can be rolled out like any other carpet. For the installation we recommend fastening the edges with a double-sided adhesive tape on the floor. We recommend our CarpetTape which can be removed without residue, or a standard carpet banding. CarpetTape has two adhesive layers - strong to the carpet back and soft and gently to the ground. CarpetWalk is designed for indoor use but can also be used for short term outdoor applications.

### Technical information CarpetWalk

Size	Width: 2 m	Length: 40 m	
Material	needle felt (100% polyester)		420μ +/- 10μ
Certificates	B1 (fire protection classification)		
	very good slip-resistance		

### Technical information CarpetTape

Size	Width: 50 mm	Length: 25 m	
Material	Double-sided adhesive tape (synthetic adhesive)		160μ +/- 10μ





# FAT FLOOR

## THE SOLUTION FOR OUTDOOR COMMUNICATION

FatFloor is designed for medium to long-term applications depending on where the product is applied. This product is available without adhesive (FatFloor) or with adhesive (FatFloor Glue) combined with AsphaltWalk smooth.

FatFloor can be used for almost all surfaces as it will be delivered without self-adhesive rear and therefore easily applied on the floor. FatFloor Glue combined with AsphaltWalk smooth are the perfect product for outside application, e.g. at (E-) petrol stations and shops where the material is under high impact. For long-term application an edge sealing is recommended. FatFloor is very resistant against wear and other influences that result from common use of the product.

### Uses

- shop entrances
- car showrooms, showrooms
- museums, meeting points and other events
- petrol stations (FatFloor Glue combined with AsphaltWalk smooth)
- indoor and outdoor parkings as well as driveways (FatFloor Glue with AsphaltWalk smooth)

### Features & Benefits

- simple application and removal
- very robust
- extremely slip-resistant





# FAT FLOOR

THE SOLUTION FOR OUTDOOR COMMUNICATION

## Durability

The durability of FatFloor is depending on the application, especially on the surface where it has been applied as well as the mechanical strain. Based on our experience we recommend a maximum use of 3 years.

## Storage

Shelf life is 12 months from delivery.

Storage conditions from +15°C to +24°C and humidity between 40% and 65%.

## Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

## Printing method

UV curable inks, solvent, eco-solvent and latex

## Waste handling

It is recommended to handle the used material and production waste as industrial waste.

- Also available as FatFloor Glue in combination with AsphaltWalk smooth

## Technical Information

Size	Width: 1.37 m	Length: 15 m	
Material	clear, slip-resistant textured vinyl available without and with adhesive (FatFloorGlue)		1300μ +/- 10μ
Adhesive	permanent acrylic solvent (FatFloorGlue)		50μ +/- 5μ
Certificate	slip resistance surface (SRT) (FatFloorGlue)		R10
Application	minimum application temperature		+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	55oz/in (66N/100 mm)	20oz/in (22N/100mm)	40oz/in (44N/100mm)
24 hours dwell	75oz/in (82N/100 mm)	25oz/in (27N/100 mm)	55oz/in (60N/100 mm)

## Chemical resistance

Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	R	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion  
I = recommended for intermittent exposure only  
NR = not recommended